




County of Bernalillo Zoning, Building & Planning Department

111 Union Square St SE • Suite 100 • Albuquerque, NM 87102 • (505) 314-0350 • Fax (505) 314-0480

APPROVED CONSTRUCTION OF TILE-LINED SHOWER RECEPTORS STANDARD SPECIFICATION FOR THE INSTALLATION OF TILE-LINED SHOWER RECEPTORS


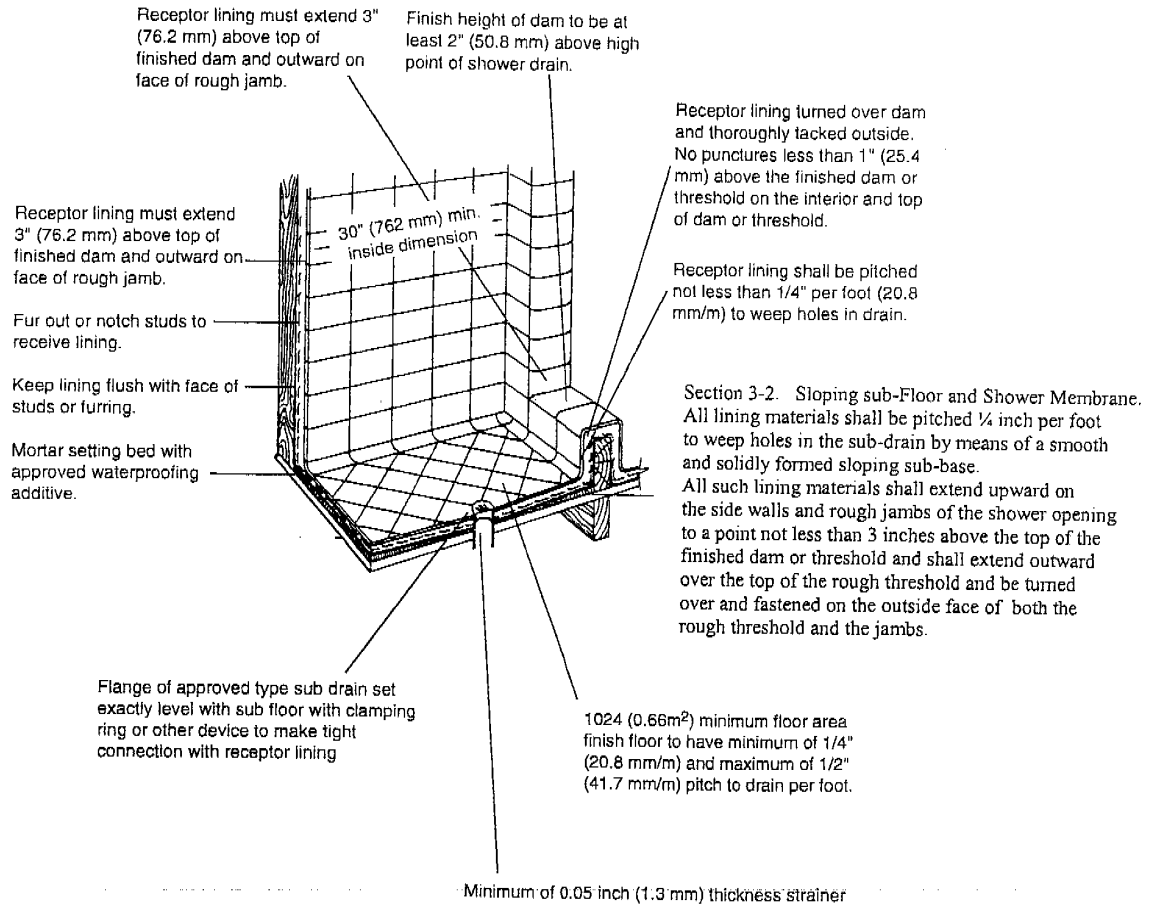


239

SHOWER PAN LINERS

1. ALL HORIZONTAL SURFACES (FLOOR AND SEAT) MUST BE COVERED WITH VINYL OR APPROVED MATERIAL.
2. LINING MUST BE NO LESS THAN 3" ABOVE DAM AND ON ALL SIDES.
3. FINISHED DAM SHALL BE MIN 2" AND MAX. 9"
4. CORNERS SHALL BE PREFORMED ON DAM, INSIDE CORNERS MAY BE PREFORMED OR FOLDED.
5. NO HOLES IN VINYL. NAILS MUST BE HIGHER THAN 1" FROM DAM
6. PREFORMED CORNERS MUST BE USED AT DOOR WAY.

6-18-03
Dawn

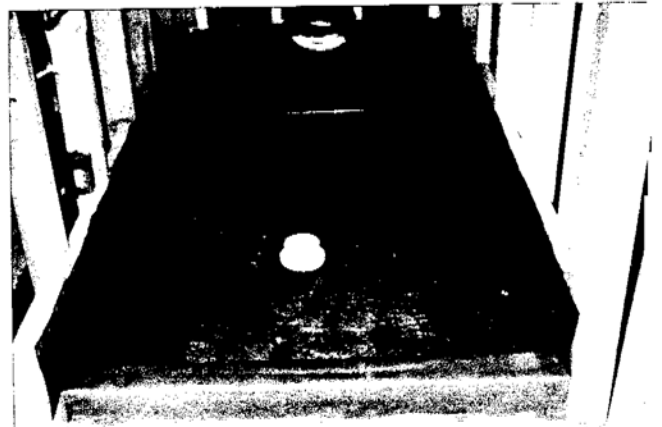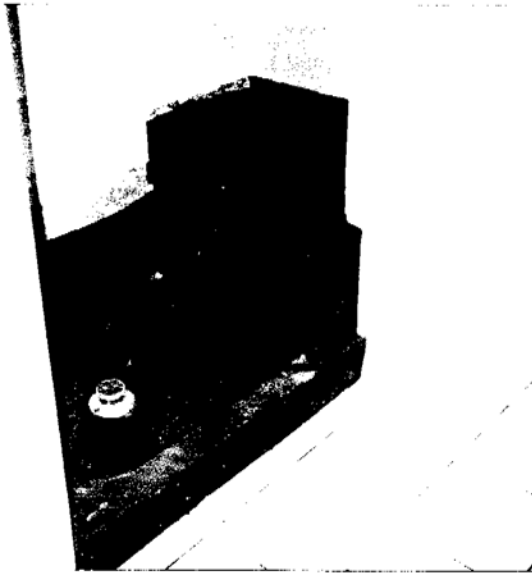

ALL horizontal surfaces must be lined.